

# Diamond W Corrals


80 Pair Capacity Corrals Starting At:

Round Tubing Corral \$ 9,000 + Freight  
Square Tubing Corral \$ 10,500 + Freight

\* F.O.B. Burlington, OK \*

\* Prices Subject to Change With Out Notice \*

ACKERMAN <sup>A</sup>  
SINCE 1969  
DISTRIBUTING .COM  
VISA MasterCard  
LaSalle, CO BBB  
800-726-9091 • 970-284-5599

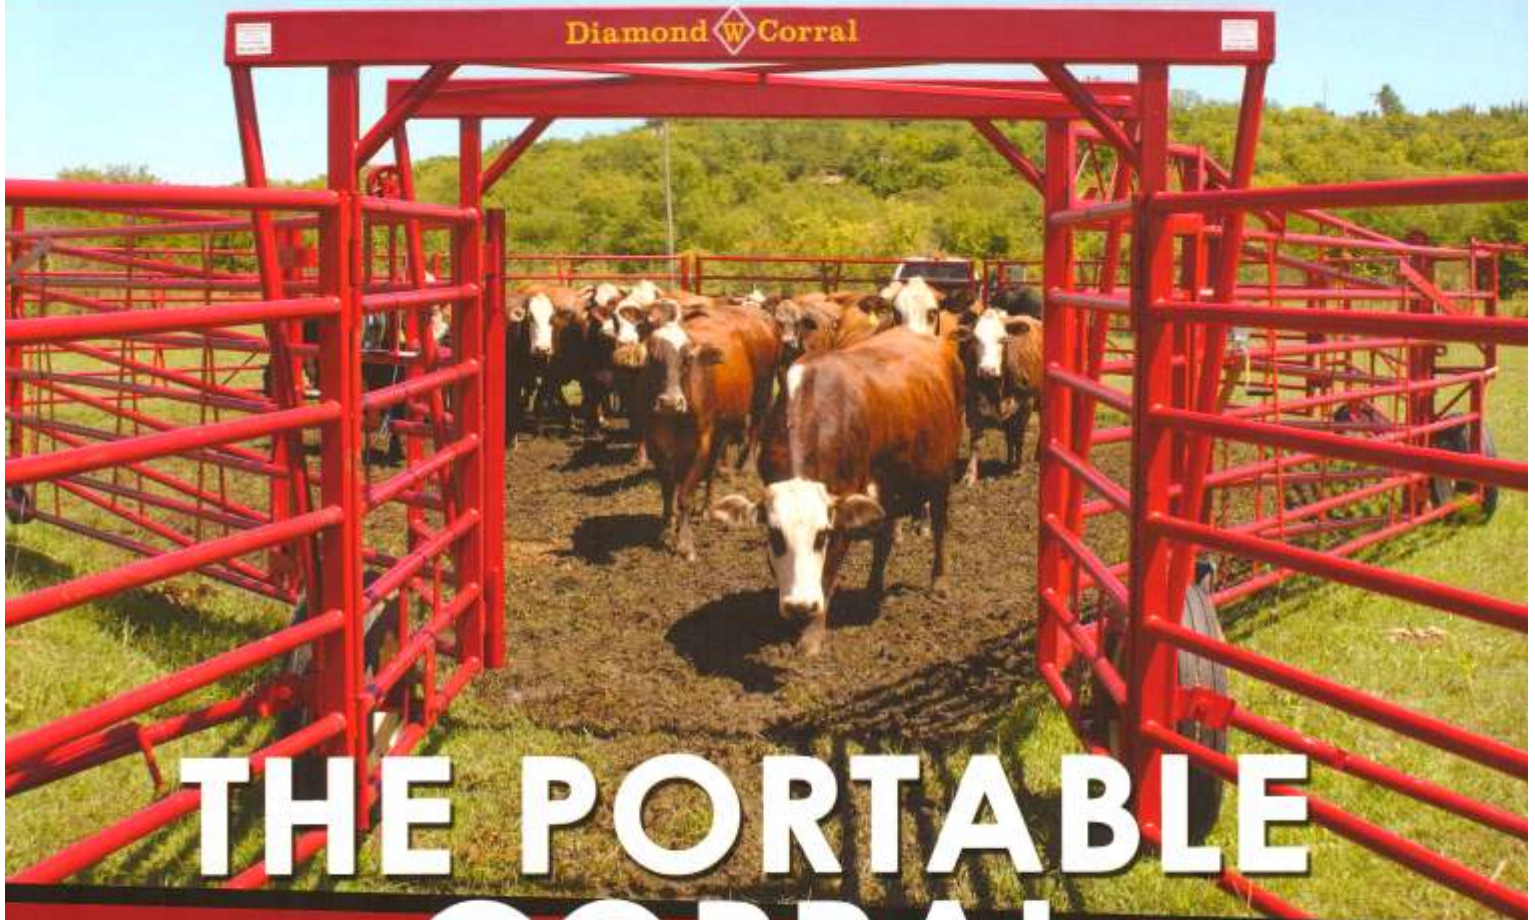

## THE PORTABLE CORRAL

*The Cadillac of Portable Corrals!*

The Portable Corral is designed by Diamond W Corrals to save rancher time with double hinged construction & 1 3/4" x 1 3/4" square tubing on a diamond pattern. This construction allows the portable corral on wheels to be set up on various types of terrain providing both the strength and mobility needed for uneven ground. All the panels are 6ft high and lifted by cable winches. The 6ft long side levers are used to easily change the rear wheel assembly for mobility in setup and transport of the corral.

- Square & Round Pipe versions
- Lift panels via cable winches, everything else on hinges!
- Setup & take down in minutes!

*Learn More Inside!*



# THE PORTABLE CORRAL FOR YOU!



4 foot walk-through gate and spring latch



A break away hitch for transport



This corral is built stronger and taller to be easier to lift for transportation.

This is the first corral with a waist-high lever to change the rear wheel direction for transport.



Double 6' gates on the front to work with livestock trailer, loading chutes and working chutes.



No. 2 panel rolls on an 18" tire.

No. 3 panel rolls on a 13" tire.

No. 4 panel rolls on a caster wheel.





An X brace is used on all panels to support springing in long panels.



The two inside divider gates are now on the double hinge system. A caster wheel is used on the end of the panel for ease of operation.



### *The Cadillac of Portable Corrals!*

Panels will be locked in place with safety chains for transportation.



All rear panels are on a double hinge system with all saddles made of flat iron; sizes vary depending on round vs square tubing.

Panels lifted with winches.



Unit capacity is 140 head at 850 lb.

All panel height from the ground is 6' tall.

# SQUARE TUBE

# VS

# ROUND TUBE

- All gates are made of 1 3/4" square tubing. All tubing is turned to make the diamond pattern for strength. Cage is a 6' x 6' square inside. 3" x 6" rectangular tubing is used for the cross support. Rear gate has a spring-loaded latch. 11L-15 8 ply implement tires and wheel are used to transport corral. All panels behind the cage are made of 1 3/4 square tubing with 120 wall thickness.
- All rear panels are on the double hinge system with all saddles made of 3/8" x 3" flat iron.
- Our demo weighs 6200 lbs.

- All panels behind the cage are made of 12 gauge round tubing. All gates are made of 14 gauge round tubing. Cage is a 6' x 6' square inside. Rear gate has a spring-loaded latch. 11L-15 8 ply implement tires and wheel are used to transport corral.
- All rear panels are on the double hinge system with all saddles made of 1/4" x 3" flat iron.
- Our demo weighs 5200 lbs.

## READY TO GO?



HERDIN' TO HEADIN' OUT IN MINUTES!

**CLOSE  
THE  
FRONT**



**FOLD  
THE  
PANELS**



**PULL  
THE  
LEVER**



**...AND GO!**